INTERNATIONAL JOURNAL OF MARITIME TECHNOLOGY

IJMT Vol.20 / Summer & Autumn 2024 (70-77)

Available online at: www. ijmt.ir

Numerical simulation of diesel engines EGR cooler

Alireza asadi seddigh[1], Kourosh Javaherdeh [2*], Mohammad Naghashzadegan [3]

[1] Professor at Faculty of Mechanical Engineering, University of Guilan, Persian Gulf Highway, Kilometer 5th of Tehran Road, University of Guilan Complex, Rasht, Iran, Email; javaherdeh@guilan.ac.ir
[2] Associate Professor at Faculty of Mechanical Engineering, University of Guilan, Persian Gulf Highway, Kilometer 5th of Tehran Road, University of Guilan Complex, Rasht, Iran, Email; naghash@guilan.ac.ir
[3] P.hd student, Campus Faculty, University of Guilan, Persian Gulf Highway, Kilometer 5 of Tehran Road, Guilan University Complex, Rasht, Iran, Email; Alireza_asadi90@yahoo.com

ARTICLE INFO

Article History:
Received: 07 Oct 2024
Accepted: 07 Jan 2025
Available online: 07 Jan 2025

Keywords:

Numerical solution, Nanofluids, C ooling, Diesel engines, Shell and t ube heat exchangers.

ABSTRACT

This article investigates the effect of using three nanofluids as exhaust gas cooling fluid in an EGR cooler. Reducing the exhaust temperature of diesel engines can reduce environmental and thermal pollutants. In a conventional 3-liter engine in all kinds of vehicles, 20 to 40 kW of its 115 kW power is being wasted. The engine shell temperature rises to 600 degrees Celsius. Exhaust gas recirculation can recover a part of it. Exhaust gas recirculation can recover thermal energy by exhaust gas recirculation method by charging a thermal energy storage tank to feed a diesel engine in cold start.Many researchers have simulated natural convection in the nanofluids. The innovation of the current research is the use of 61 tubes inside the small heat exchanger that is cooled by the discussed nanofluids in the exhaust gas recirculation system of the diesel engine that works with the paraffin phase changer and the exhaust gas recirculation rate is 60% to Reduce of environmental pollution and smoother operation of diesel engine. The inlet is steady state turbulent. The thickness of the inner tubes is considered close to zero. The shell is adiabatic. Both of them exit the heat exchanger under pressure. Three nanoparticles of diamond, silicon dioxide, and copper are considered. This numerical simulation has solved the continuity equations, energy, Navier-Stokes, the pressure drop along the pipe, flow, and rotation equation, kinetic energy disturbance, and energy loss rate equation. The results showed a higher pressure drop for the silicon dioxide-ethylene glycol nanofluid. Silicon dioxide-ethylene glycol nanofluid has a higher Nusselt number, slightly different from other nanofluids. Also, Copper ethylene glycol has a lower Velocity among nanofluids.

1. Introduction

Industries that use heavy diesel engines [1-5] use the heat exchanger as a cooling part [6] Reducing the exhaust temperature of diesel engines can reduce environmental and thermal pollutants. [7-10] Many researchers have simulated natural convection in the nanofluids. [11-15] Mathematical modeling of the suggested mass fractions compounds table, proportional to the exhaust gas recirculation rate. [16-17] Neeraj R. Koshta et al worked on dealing with the sonochemical synthesis of finely dispersed reduced graphene oxide–TiO_2 (rGO/TiO_2) nanocomposites with successful immobilization of TiO_2 nanoparticles on rGO.[18]. In an experimental study by Akash, the results reported a maximum of 25% improvement in Al nanofluid. [19-22]. Pantzeli et al. [23-24] showed that the use of nanofluid will be beneficial only when viscosity increases and is not limited to the turbulent flow regime. Peyghambarzadeh et al [25] showed that by adding 1% aluminum oxide to nanofluid, the Nusselt number can be increased by 40%. This result was obtained from an experimental study by increasing the water circulation rate (increasing the water flow rate) inside the car radiator. Five different compounds of 0.1% to 1% copper oxide in combination with water-based fluid were investigated in this research. Fan et al. [26] showed that it is possible to improve the convection heat transfer by

[Downloaded from ijmt.ir on 2026-10-08]

adding carbon nanofiller to the phase change paraffin. This work was done by reducing the phase change enthalpy in a numerical study with laminar flow. In this type of heat exchanger, Carbon nanotubes are installed with multi-layered walls, and the thermal energy storage tank is made of carbon nanofibers. Johnson [27] showed that in a conventional 3-liter engine in all kinds of vehicles, 20 to 40 kW of its 115 kW power is being wasted. Exhaust gas recirculation can recover a part of it. The engine shell temperature rises to 600 degrees Celsius. Schatz [28-30] has presented the necessary concept to recover thermal energy by exhaust gas recirculation method by charging a thermal energy storage tank to feed a diesel engine in cold start. In this research, it is shown that the heat of the engine before turning off is saved and used for better engine start in cold environments. Not many methods have been proposed to improve the heat exchanger with nanofluid or by optimizing the geometry design. Combine these two areas of work besides cooling and exhaust gas recirculation is the novelty of the current research. The returning system can recycle heat energy. As in Fig 1, heat that the heat exchanger takes exits the oil circuit and takes it to the tank carrying the phase change material. This research uses a flat heat exchanger (plate) and water-copper oxide nanofluid (4% copper oxide) has been done experimentally. A 3.8% improvement in heat transfer rate by only adding 2% nanoparticles copper to ethylene glycol base fluid has been obtained in this research. [31-34] Heidar Sadeghzah, and Marc A Rosen [35] showed that by designing a multi-subject algorithm on important variables in heat exchanger geometry design. It is possible to reach the design of an optimal heat exchanger. Miqdam T Chaichan, and Shaimaa H Kamel, showed that nanoparticles such as aluminum oxide and titanium dioxide with five different volume fractions can be mixed with paraffin to store or dissipate more heat. [36] Sarkar and Tarodia [37] showed that volume dispersion is important in the performance of nanofluid to such an extent that, cooling and second laws efficiency, decreases. Barry and Nisar Hossein [38], showed that 50% of the working load of the engine is always being wasted, and they were 18% of the system's output. In addition, they showed that at a working pressure below 30 atmospheres, parallel arrangement, and higher pressure, sequential arrangement will be beneficial to obtain higher power. Usman Rahman [39-45] showed that for the numerical simulation k-Ɛ model is more suitable for high Reynolds numbers near a wall. This research was carried out by investigating the Ansys Fluent with pure water cooling fluid. Anderson and Nation [46] presented a special design for recovering heat energy that is being lost, which has two separate cooling fluids, in two separate circuits and with different pressure and temperature. A heat exchanger and a molten salt energy storage tank were placed between these two circuits.

2.Mathematical model

Geometry designed in the Ansys design modeler and c omputational meshing made with Ansys meshing are given in Fig 1, 2, and 3.

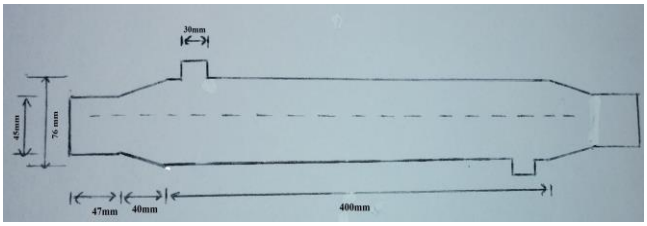

Fig. 1. Dimensions of studied heat exchanger geometry (Property of author(s))

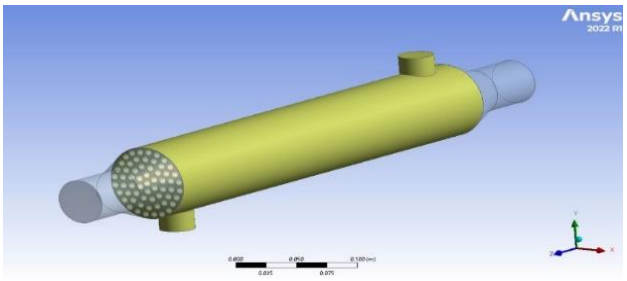

Fig. 2a. Shell side (Property of author(s))

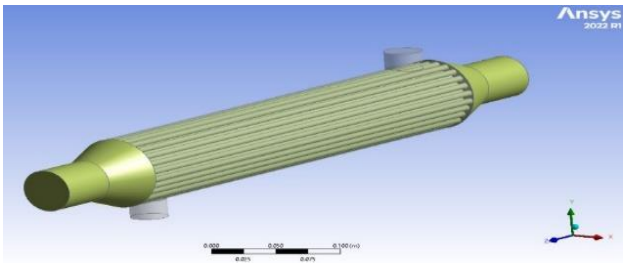

Fig. 2b. Tubes side (Property of author(s))

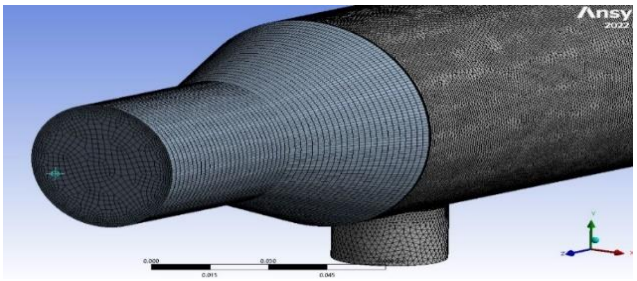

Fig. 3. Mesh network (Property of author(s))

60% R_{EGR} was used for this numerical work. (Highest R_{EGR} rate with considering all exhaust gas constituents) [16]

[Downloaded from ijmt.ir on 2026-10-08]

Table I. Exhaust gas compositions proportional to the EGR rate [16]

R_{EGR} [%]	Y_{O2}	Y_{CO2}	Y_{H2O}	Y_{N2}
0	0/1839	0/043	0/0164	0/7564
20	0/1718	0/0536	0/0205	0/7539
40	0/1519	0/0711	0/0272	0/7496
60	0/1126	0/1055	0/0403	0/7413
80	0	0/2043	0/0781	0/7175

Equations governing the problem are:

$$\partial\rho\partial t + \nabla \cdot (\rho u) = 0 \quad \text{[38] (1)}$$

$$\frac{\partial \rho \mathbf{u_i k}}{\partial \mathbf{x_i}} = \frac{\partial}{\partial \mathbf{x_i}}\left[\left(\mu + \frac{\mu_i}{\sigma_k}\right)\frac{\partial \mathbf{k}}{\partial \mathbf{x_i}}\right] + G_k - \rho\varepsilon \quad \text{[39] (2)}$$

$$\frac{\partial \mathbf{u_i} T}{\partial \mathbf{x_i}} = \rho \frac{\partial}{\partial \mathbf{x_i}}\left[\left(\frac{\mathbf{v}}{p_r} + \frac{\mathbf{v_i}}{\mathbf{p_{r_j}}}\right)\frac{\partial T}{\partial \mathbf{x_i}}\right] \quad \text{[40] (3)}$$

$$\rho(T) = \frac{P_0}{[(\Sigma_i \frac{y_i}{M_i})R_g T]} \quad \text{[16] (4)}$$

$$\mu(T) = \Sigma_i y_i \cdot \mu_i \quad \text{[16] (5)}$$

$$\lambda(T) = \Sigma_i y_i \cdot \lambda_i \quad \text{[16] (6)}$$

$$C_P(T) = \Sigma_i y_i \cdot C_{Pi} \quad \text{[16] (7)}$$

$$\mu_i = \sum a_{i,j} \cdot T^j \quad \text{[16] (8)}$$

$$k_i = \sum_j b_{i,j} \cdot T^j \quad \text{[16] (9)}$$

$$c_{pi} = R_g \cdot \sum_j c_{i,j} \cdot T^j \quad \text{[16] (10)}$$

$$Nu = \frac{hL}{k} \quad \text{[16], (11)}$$

$$f_{laminar} = \frac{64}{Re} \quad \text{[42], (12)}$$

3. Numerical model

The inlet is steady state turbulent. The thickness of the inner tubes is considered close to zero. The shell is adiabatic. Both of them exit the heat exchanger under pressure. The boundary conditions are [16]:

For inlet of exhaust gas:

T_{in}=523/15 k
u=v=w=33 m/s→ -r ≤ x ≤ r, -r ≤ y ≤ r, z=0
For the outlet of exhaust gas:
P_{out} , T_{out} → -r ≤ x ≤ r , -r ≤ y ≤ r , z=L
Wall side of the tubes:
$T=T_W$
u=v=w= 0 → 0 ≤ z ≤ L, x = ±r, y = ±r

At different flow rates of the pure water coolant, The observed difference is a maximum of 5%, which indicates the validity of the results obtained from the present simulation.

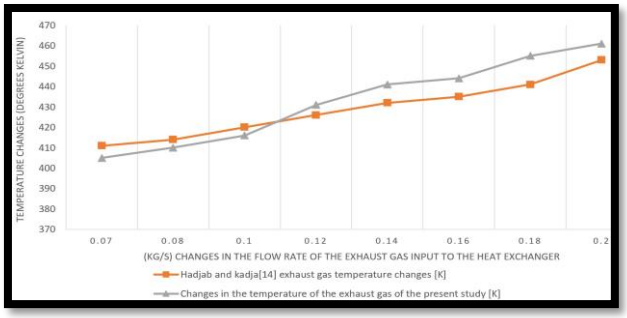

Fig. 4. Validation chart (Property of author(s))

The figure below shows the change in the exhaust gas temperature from the numerical simulation of the current research in different mesh networks. Numerical simulation showed that when the mesh number of the network exceeds 10 million, the same result is obtained in three different mesh sizes, indicating the mesh's independence from the computing network in the numerical simulation of the present study.

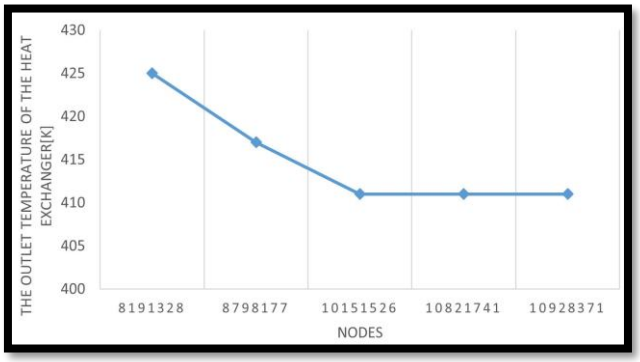

Fig. 5. Diagram of mesh independence of computing network (Property of author(s))

4. Results

Temperature changes are not noticeable. Because the exhaust gas outlet temperature has not changed almost by changing the coolant from pure water to the mentioned nanofluids.

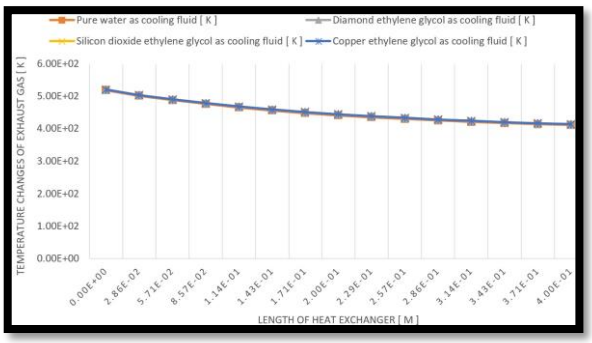

[Downloaded from ijmt.ir on 2026-10-08]

Fig. 6. Exhaust gas temperature changes according to heat exchanger length changes (Property of author(s))

The comparison of nanofluids shows that the pressure drop of silicone dioxide-ethylene Glycol is higher than copper-ethylene glycol and diamond-ethylene glycol. This result shows the better heat transfer properties of silicon dioxide ethylene glycol nanofluid.

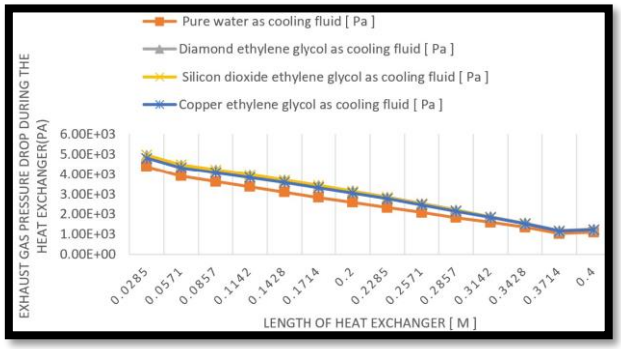

Fig. 7. Changes in exhaust gas pressure (Property of author(s))

Nusselt number (Nu_L) [39, 40] was calculated by extracting changes from Fluent software and calculating the specific heat values (variable with temperature) [16], Then The amount of energy was calculated with a known flow rate and specific heat formula. The convection has been calculated. The conduction coefficient is also obtained [16]. Nusselt number change charts show a higher Nusselt number for SiO_2-EG. This result shows the better heat transfer properties of silicon dioxide ethylene glycol nanofluid.

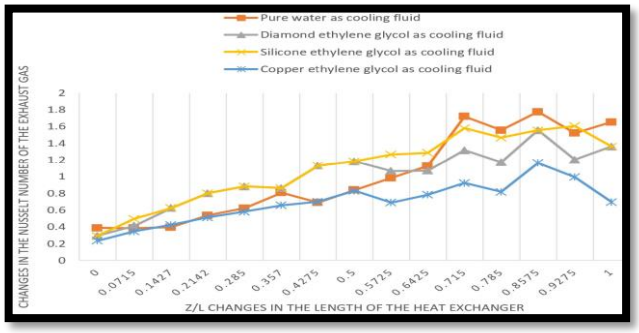

Fig. 8. Changes in the Nusselt number of the exhaust gas (Property of author(s))

In the figure below, calculations of the amount of friction with the help of Excel software and output data from Fluent showed that if pure water is the cooling fluid, it has a lower friction coefficient than the current nanofluids. Therefore, in the case where pure water is used as a coolant, less sedimentation occurs in current nanofluids. It is effective in increasing the life of the heat exchanger in the long run.

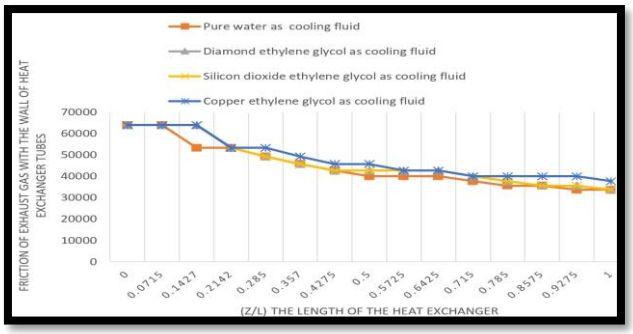

Fig. 9. Friction coefficient changes according to heat exchanger length changes (Property of author(s))

Velocity graphs [38,39,41,42] have shown that the exhaust gas with water as cooling fluid passes with lower velocity. Output data from Fluent showed, that if the exhaust gas is cooled with copper ethylene glycol in the heat exchanger, it passes through the heat exchanger at a lower velocity(Compared to other nanofluids), so it can have more opportunity to cool the exhaust gas.

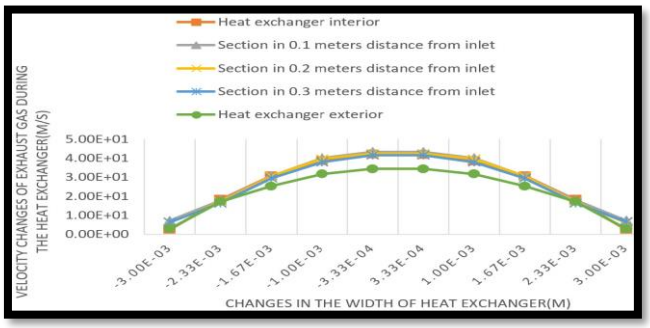

Fig. 10. Velocity profile of gas for pure water (Property of author(s))

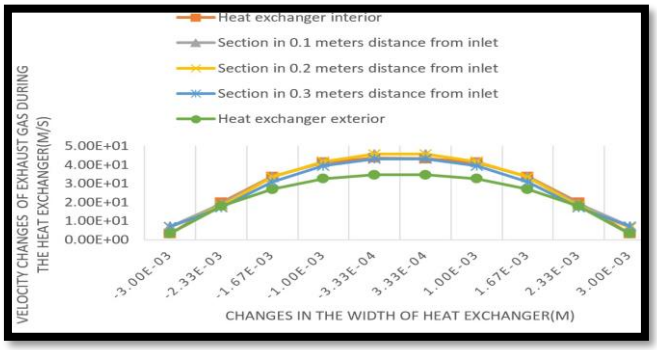

Fig. 11. Velocity profile of gas for di-eg (Property of author(s))

[Downloaded from ijmt.ir on 2026-10-08]

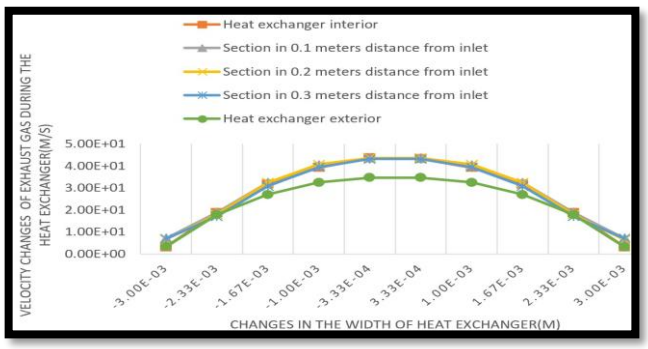

Fig. 12. Velocity profile of gas for si-eg (Property of author(s))

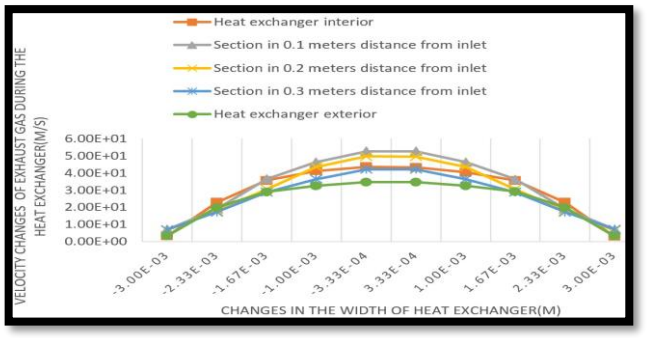

Figure 13. Velocity profile of gas for cu-eg (Property of author(s))

5. Conclusion

1) Examining the contours and pressure profiles for silicon dioxide-ethylene glycol nanofluid shows the better heat transfer properties of silicon dioxide-ethylene glycol nanofluid.
2) In the (Nu_L) diagram, silicon dioxide-ethylene glycol nanofluid is better. The higher the forced convection, the more energy the exhaust gas recirculation system will store in the phase change paraffin tank.
3) Although the amount of friction of the exhaust gas is not very important considering its discharge into the atmosphere. But due to the effect of temperature changes on it, it has been investigated and its diagram shows the lower friction of the gas cooled by pure water.
4) Examining velocity graphs has shown that Copper ethylene glycol has a lower velocity among nanofluids.

List of Symbols

cu-eg	Copper- ethylene glycol
di-eg	Diamond-ethylene glycol
k_i	Conduction function
P_o	Initial pressure [Pa]
R_g	Ideal gas constant
R	Radius [m]
si-eg	Silicon- ethylene glycol
v	Velocity along with j
w	Velocity along with k
Y	Volume fraction [%]

Greek symbols

ϵ	Turbulent dissipation rate *[J/kg.s]*
$\lambda(T)$	Convection function [w/ m^2. k]
$\mu(T)$	Viscosity function
μ	Viscosity [kg/m.s]
$\rho(T)$	Density function
∂	Partial differential
σ_k	Turbulent Prandtl number

6.References

[1] TaleshAmiri, S., Shafaghat, R., Mohebbi, M., Mahdipour, M. A., & Esmaeili, M. (2021). Power Enhancement of a Heavy-Duty Rail Diesel Engine Considering the Exhaust Gas and ancillary facilities Temperature Limitation: A Feasibility Study. *International Journal of Maritime Technology*, *15*, 107-118.

[2] Sharifi, S., & Gholami, H. (2023). A new multi-objective model for berth allocation and quay crane assignment problem with speed optimization and air emission considerations (A case study of Rajaee Port in Iran). *International Journal of Maritime Technology*, *17*, 25-48.

[3] Durgesh Bhatt, Priyanka M Javhar, (2012), Shell and Tube Heat Exchanger Performance Analysis, Sri Satya Sai Institute of Science & Technology, Sehore, Madhya Pradesh, India.

[4] Ankur Geete *et al*, Entropy, (2021), Exergy and Entransy Analyses on Fabricated Shell and Spiral Tube Heat Exchanger, Journal of The Institution of Engineers (India): Series C, Volume 102, pages 897–908.

[5] Leong, K.Y, *et al*, (2010), Performance Investigation of an Automotive Car Radiator Operated With Nanofluid-based Coolants (Nanofluid As a Coolant in a Radiator), Applied Thermal Engineering, Vol. 30, Nos. 17–18, pp.2685–2692.

[6] Brahim Mahfoud, (2023), Effect of Wall Electrical Conductivity on Heat Transfer Enhancement of Swirling Nanofluid-Flow, Journal of Nanofluids, Vol. 12, pp. 418–428.

[Downloaded from ijmt.ir on 2026-10-08]

[7] Shashank Ranjan Chaurasia, R. M. Sarviya, (2021), Experimental and Numerical Thermal Performance Evaluation of Helical Screw Inserts in a Tube with Double Strips at Laminar Flow, Computational Thermal Sciences: An International Journal.

[8] JA RB, K KK, (2018), Thermodynamic analysis of hybrid nanofluid based solar flat plate collector. World Journal of Engineering. Feb 12;15(1):27-39.

[9] Belahmadi E, Bessaih R, (2018), Heat transfer and entropy generation analysis of Cu-water nanofluid in a vertical channel. World Journal of Engineering. Oct 1;15(5):604-613.

[10] Almakki M *et al*, (2020), Entropy generation in magneto nanofluid flow with Joule heating and thermal radiation. World Journal of Engineering. Feb 19;17(1):1-1.

[11] A. J. Chamkha, (2002), On Laminar Hydromagnetic Mixed Convection Flow in A Vertical Channel with Symmetric and Asymmetric Wall Heating Conditions, Int. J. Heat Mass Transfer 45, 2509.

[12] S. U. S. Choi and J. A. Eastman, (1995), Enhancing Thermal Conductivity of Fluids with Nanoparticles, ASME Int. Mech. Eng. Expo. 66, 99.

[13] Abro KA, Laghari MH, Gómez-Aguilar JF, (2020) Application of Atangana-Baleanu Fractional Derivative to Carbon Nanotubes Based Non-Newtonian Nanofluid: Applications in Nanotechnology. Journal of Applied and Computational Mechanics. Dec 1;6(Special Issue):1260-9.

[14] Manjunatha S, Puneeth V, Gireesha BJ, Chamkha A, (2022), Theoretical study of convective heat transfer in ternary nanofluid flowing past a stretching sheet. Journal of Applied and Computational Mechanics. Oct 1;8(4):1279-86.

[15] Rashed AS, Mahmoud TA, Kassem MM, (2021), The behavior of nanofluid with variable brownian and thermal diffusion coefficients adjacent to a moving vertical plate. Journal of Applied and Computational Mechanics. Jul 1;7(3):1466-79.

[16] Riad Hadjab and Mahfoud Kadja, (2018), Computational Fluid Dynamics Simulation of Heat Transfer Performance of Exhaust Gas Re-circulation Coolers for Heavy-duty Diesel engines**,** a Department of Drilling and Mechanic of Oil Yards, University of Kasdi Merbah Ouragla, Algerie, Laboratory of Applied Energetics and Pollution, Department of Mechanical Engineering, University of Mentouri, Constantine, Algerie.

[17] Swaminathan Ponmani *et al*, , (2020), Investigations on the thermal and electrical conductivity of polyethylene glycol-based CuO and ZnO nanofluids, Indian Chemical Engineer, Volume 62.

[18] Neeraj R. Koshta *et al*, (2020), Investigation on the thermal conductivity and convective heat transfer enhancement in a helically coiled heat exchanger using ultrasonically prepared rGO–TiO_2 nanocomposite-based nanofluids, Indian Chemical Engineer Volume 62.

[19] Debasree Ghosh, Chandan Guha, (2020), Numerical simulation of paraffin wax melting in a rectangular cavity using CFD, Indian Chemical Engineer Volume 62.

[20] Xie S *et al*, (2018), A Numerical Study on Heat Transfer Enhancement and Flow Structure in Enhanced Tube with Cross-Ellipsoidal Dimples. Int. J. Heat Mass Transf. 125, 434–444.

[21] A. R. Akash *et al*, (2019), Experimental Assessment of the Thermo-Hydraulic Performance of Automobile Radiator with Metallic and Nonmetallic Nanofluids, Heat Transfer journal. Eng. 41, 235.

[22] R.S. Vajjha, *et al*, (2010), Numerical study of fluid dynamic and heat transfer performance of Al2O3 and CuO nanofluids in the flat tubes of a radiator, International Journal of Heat and Fluid Flow.

[23] M. N. Pantzali *et al*, (2009), Investigating the efficacy of nanofluids as coolants in plate heat exchangers (PHE), Chemical Engineering Science, vol. 64, no.14, pp. 3290–3300.

[Downloaded from ijmt.ir on 2026-10-08]

[24] Leong, K.Y *et al*, (2010), Performance investigation of an automotive car radiator operated with nanofluid-based coolants (nanofluid as a coolant in a radiator), Applied Thermal Engineering, Vol. 30, Nos. 17–18, pp.2685–2692.

[25] Peyghambarzadeh *et al*, (2011), Improving the cooling performance of automobile radiator with Al2O3/water nanofluid, Applied Thermal Engineering, Vol. 31, No. 9, pp.1833–1838.

[26] Fan L. W. *et al*, (2013), Effects of various carbon nano-fillers on the thermal conductivity and energy storage properties of paraffin-based nano-composite phase change materials, Applied Energy.

[27] V. Johnson, (2002), "Heat-generated cooling opportunities in vehicles," SAE Technical Papers.

[28] Schatz Oskar, (1992), Cold start improvement by use of latent heat stores. Automotive Eng J1458–1470.

[29] Yu, W, S.U.S. Choi, (2003), "The Role of Interfacial Layers in The Enhanced Thermal Conductivity of Nanofluids: A Renovated Maxwell Model, "J. Nanoparticle Res.

[30] X. Zhong, L. X. Yu, (2011), Experimental Study on Heat Exchange Enhancement of Nanofluids in Vehicle Oil Cooler, Chinese Internal Combustion Engine Engineering, 32(3).

[31] P. Gunnasegaran, *et al*, (2012), Numerical Study of Fluid Dynamic and Heat Transfer in a Compact Heat Exchanger Using Nanofluids, Department of Mechanical Engineering, College of Engineering, University Tenaga Nasional, Km7, Jalan Kajang-Puchong, Kajang, Malaysia.

[32] Seyed Salar Hoseini *et al*, (2018), Thermal and Fluid Simulation of a New Diesel Engine Cooling Exhaust Gas Recirculation System to Reduce Exhaust Gas Emissions, University of Tehran, Iran.

[33] Mathew V Karvinkoppa, Tapano Kumar Hotta, (2019), Transient Analysis of Phase Change Material for The Cooling of Discrete Heat Sources Under Mixed Convection, Vellore Institute of Technology, Vellore, Tamil Nadu, India.

[34] Bala Bhaskara Rao and V. Ramachandra Raju, (2016), Numerical and Heat Transfer Analysis of Shell and Tube Heat Exchanger with Circular and Elliptical Tubes, Department of Mechanical Engineering, Sistan College, Kakinada, India.

[35] Heidar Sadeghzadeh, Marc A Rosen, (2015), Optimization of a Finned Shell and Tube Heat Exchanger Using a Multi-Objective Optimization Genetic Algorithm**,** Department of Mechanical Engineering, Science and Research Branch, Islamic Azad University, Tehran, Iran.

[36] Miqdam T Chaichan, Shaimaa H Kamel, (2015), Thermal Conductivity Enhancement by Using Nanomaterial in Phase Change Material for Latent Heat Thermal Energy Storage Systems, Mechanical Engineering Dept, University of Technology, Baghdad, Iraq. The Middle Technical University, Baghdad, Iraq.

[37] Jahar Sarkar and Rahul Tarodiya, (2013), Performance Analysis of Louvered Fin Tube Automotive Radiator Using Nanofluids as Coolants, Department of Mechanical Engineering, Indian Institute of Technology (BHU), Varanasi, UP-221005, India.

[38] Shekh Nisar Hossain Rubaiyat, Saiful Bari, (2010), Waste heat recovery using shell and tube heat exchanger from the exhaust of an automotive engine, Sustainable Energy Centre, School of Advanced Manufacturing and Mechanical Engineering, University of South Australia, SA 5095, Australia.

[39] Usman ur Rehman, (2011), Heat Transfer Optimization of Shell-and-Tube Heat Exchanger through CFD Studies, Master's Thesis in Innovative and Sustainable Chemical Engineering Department of Chemical and Biological Engineering Division of Chemical Engineering Chalmers University Of Technology Goteborg, Sweden.

[40] Huang, Y. Q *et al*, (2008), Numerical Simulation and Optimization Design of the EGR Cooler in Vehicle, Journal of Zhejiang University Science, pp. 1270-1276.

[Downloaded from ijmt.ir on 2026-10-08]

[41] Mathew V Karvinkoppa, Tapano Kumar Hotta, (2019), Transient Analysis of Phase Change Material for the Cooling of Discrete Heat Sources Under Mixed Convection, Vellore Institute of Technology, Vellore, Tamil Nadu, India.

[42] Nicola Aldi *et al*, (2022), Performance Degradation of a Shell-and-Tube Heat Exchanger Due to Tar Deposition**,** Department of Engineering (DE), University of Ferrara, 44122 Ferrara, Italy, Energies.

[43] Aminifar *et al*, (2020), Experimental Investigation of Hydro-Thermodynamics Performance of Shell and Tube Heat Exchanger Using Nanofluid, Triangular-Cut Twisted Tape and Corrugated Pipes, Department of Mechanical Engineering, Ahvaz Branch, Islamic Azad University, Ahvaz, Iran.

[44] Ender Ozden, Ilker Tari, (2010), Shell Side CFD Analysis of a Small Shell-And-Tube Heat Exchanger, Department of Mechanical Engineering, Middle East Technical University, 06531, Ankara, Turkey.

[45] An F Gizzatullina *et al*, (2021), Analysis of Ribbed Tube Heating in The Cooling System, Kalashnikov Izhevsk State Technical University, 426000, 7, Studencheskaya str., Izhevsk, Russia

[46] Anderson LZ, Robert Nation H, (1982), Waste heat recovery system for an internal combustion engine. United States patent [4351,155].

[Downloaded from ijmt.ir on 2026-10-08]